






## Rapid Crete Waterproofing

| SKU    | Description        | Quantity  | Pallet Deposit |
|--------|--------------------|-----------|----------------|
| 160730 | 50 Lbs. Bag – Gray | 56/Pallet | \$14.00        |

- Ideal for waterproofing masonry and concrete surfaces
- Cement-based waterproof coating
- Just add water!
- No additives needed!
- Suitable for above grade or below grade use
- Suitable for brush or spray application
- Can be used in ponds
- When used in ponds, allow 24 hours curing time before refilling pond
- Fill and empty pond twice to remove alkali and dust particles before adding any fish

**Acrylic Preblended in Bag!**

### FAST SETTING – READY IN 4 HOURS!

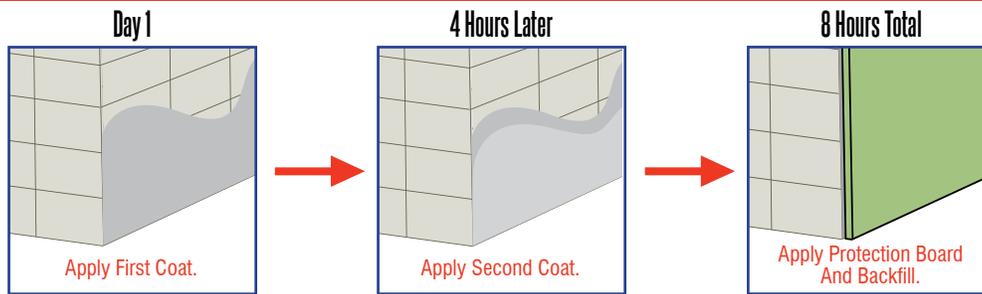

### Testing

| Test       | Description                  | Time    | Result        |
|------------|------------------------------|---------|---------------|
| ASTM C-266 | Gilmore Initial Set          | NA      | 35 Minutes    |
| ASTM C-266 | Gilmore Final Set            | NA      | 50 Minutes    |
| ASTM C-579 | Compressive Strength         | 6 Hours | 1502 psi      |
| ASTM C-579 | Compressive Strength         | 1 Day   | 2125 psi      |
| ASTM C-579 | Compressive Strength         | 7 Day   | 2831 psi      |
| ASTM C-579 | Compressive Strength         | 28 Day  | 3806 psi      |
| ASTM C-307 | Tensile Strength             | 28 Day  | 497 psi       |
| ASTM C-531 | Shrinkage                    | 28 Day  | 0.068%        |
| ASTM C-580 | Flexural Strength            | 28 Day  | 1225 psi      |
| ASTM C-580 | Modulus of Elasticity        | 28 Day  | 1,256,073 psi |
| ASTM C-580 | Secant Modulus of Elasticity | 28 Day  | 993,848 psi   |

### Coverage

One coat is usually sufficient for damp proofing. The first coat should be applied at a thickness of about 25 mils (approx. 2 lbs. per sq. yard). If waterproofing is required, a second coat will be necessary. The second coat should be applied at a thickness of about 15 mils (approx. 1 lb. per sq. yard).

- Approx. 225 Sq. Ft./50 LBS. Bag at 25 mils thick.
- Approx. 450 Sq. Ft./50 LBS. Bag at 15 mils thick.



## Rapid Crete Rapid Plug

| SKU    | Description         | Quantity           | Pallet Deposit |
|--------|---------------------|--------------------|----------------|
| 160760 | Rapid Plug 5 Gallon | 36 Buckets/Pallets | None           |

Fast setting water proof mortar used to repair cracks and holes in masonry, even when water is flowing.



**BAGGED PRODUCT FOR EASY STORAGE AND REUSE**

## MasterSeal 581

| SKU    | Description         | Quantity  | Pallet Deposit |
|--------|---------------------|-----------|----------------|
| 160257 | 50 Lbs. Bag – White | 48/Pallet | None           |
| 160263 | 50 Lbs. Bag – Gray  | 48/Pallet | None           |

- Cement-based waterproof coating
- Must mix with acryl 60 admix
- Resistant to both positive and negative hydrostatic pressure
- NSF approved – suitable for use in potable water
- Suitable for above grade or below grade use
- Suitable for brush or spray application



## MasterProtect P 110

| SKU    | Description                  | Quantity  | Pallet Deposit |
|--------|------------------------------|-----------|----------------|
| 160284 | MasterProtect P 110 1-Gallon | 4/Case    | None           |
| 160286 | MasterProtect P 110 5-Gallon | 36/Pallet | None           |

- Water-based acrylic modifying admixture
- Improves adhesion and durability
- Stable – will not re-emulsify in water
- NSF approved – suitable for use in potable water



## MasterEmamco A660


| SKU    | Description   | Quantity  | Pallet Deposit |
|--------|---------------|-----------|----------------|
| 160275 | 1 Gal. Bottle | 4/Case    | None           |
| 160281 | 5 Gal. Pail   | 36/Pallet | None           |

- Water-based acrylic modifying admixture
- Improves adhesion and durability
- Stable – will not re-emulsify in water
- NSF approved – suitable for use in potable water

Normal mixing ratio is 1 part acryl 60 to 3 parts clean water. If increased performance is desired, the ratio can be increased to 1 to 2 or even 1 to 1.



**Allow 24 hours drying time between coats.**

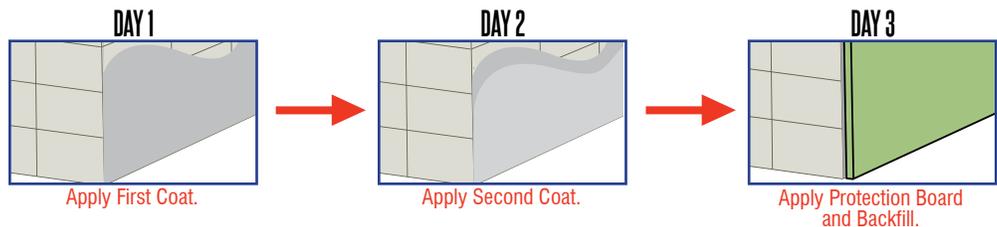

### Testing

| Test       | Description           | Time   | Result                     |
|------------|-----------------------|--------|----------------------------|
| ASTM C-266 | Gilmore Initial Set   | NA     | 10 Minutes                 |
| ASTM C-266 | Gilmore Final Set     | NA     | 90 Minutes                 |
| ASTM C-579 | Compressive Strength  | 7 Day  | 4200 psi                   |
| ASTM C-579 | Compressive Strength  | 28 Day | 6030 psi                   |
| ASTM C-307 | Tensile Strength      | 7 Day  | 250 psi                    |
| ASTM C-307 | Tensile Strength      | 28 Day | 440 psi                    |
| ASTM C-580 | Flexural Strength     | 7 Day  | 360 psi                    |
| ASTM C-580 | Flexural Strength     | 28 Day | 1027 psi                   |
| ASTM C-580 | Modulus of Elasticity | 28 Day | 2.72 x 10 <sup>6</sup> psi |

### Coverage

One coat is usually sufficient for damp proofing. The first coat should be applied at a thickness of about 25 mils (approx. 2 lbs. per sq. yard). If waterproofing is required, a second coat will be necessary. The second coat should be applied at a thickness of about 15 mils (approx. 1 lb. per sq. yard).

- Approx. 225 Sq. Ft./50 LBS. Bag at 25 mils thick.
- Approx. 450 Sq. Ft./50 LBS. Bag at 15 mils thick.




## Thoroseal Foundation Coat

| SKU    | Description        | Quantity  | Pallet Deposit |
|--------|--------------------|-----------|----------------|
| 160269 | 50 Lbs. Bag – Gray | 48/Pallet | None           |

- Cement-based waterproof coating
- Specially formulated for exterior, below grade use
- Must mix with acryl 60 admix
- Resistant to both positive and negative hydrostatic pressure

*Allow 24 hours drying time between coats.*

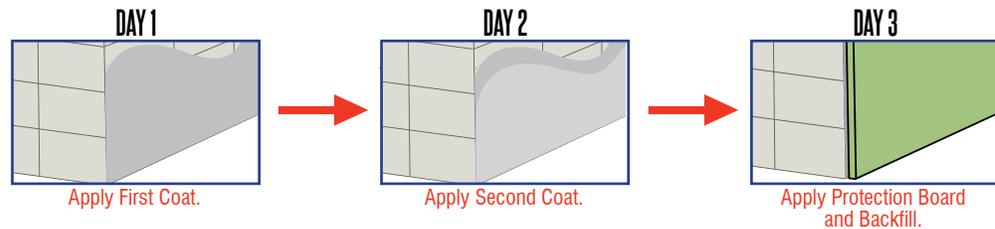

### Testing

| Test               | Description              | Time   | Result   |
|--------------------|--------------------------|--------|----------|
| ASTM C-67          | Water Absorption         | NA     | 3.9%     |
| FED SPEC TT-P-0035 | Impact Strength          | NA     | 24 lbs.  |
| FED SPEC TT-P-0035 | Hardness                 | 21 Day | 47 lbs.  |
| ASTM E-96          | Water-Vapor Transmission | NA     | 12 perms |

### Coverage

One coat is usually sufficient for damp proofing. The first coat should be applied at a thickness of about 25 mils (approx. 2 lbs. per sq. yard). If waterproofing is required, a second coat will be necessary. The second coat should be applied at a thickness of about 15 mils (approx. 1 lb. per sq. yard).

- Approx. 225 Sq. Ft./50 LBS. Bag at 25 mils thick.
- Approx. 450 Sq. Ft./50 LBS. Bag at 15 mils thick.

FOR MORE INFORMATION SEE [www.thoroproducts.com/products\\_waterproofing.htm](http://www.thoroproducts.com/products_waterproofing.htm)



## Thoroseal Waterplug

| SKU    | Description           | Quantity  | Pallet Deposit |
|--------|-----------------------|-----------|----------------|
| 160296 | 1 Gal. Can (10 Lbs.)  | 4/Case    | None           |
| 160303 | 5 Gal. Pail (50 Lbs.) | 36/Pallet | None           |

- Cement-based, one-component water-stop repair mortar
- Fast setting – will set above or below water
- NSF approved – suitable for use on drinking water systems
- Expands to lock in place
- Durable – maintains volume stability over time



To order  
**1-800-325-6851**  
[www.wswcorp.com](http://www.wswcorp.com)

# Waterproofing

## Elasto-Deck Bt

| SKU    | Description             | Quantity        | Pallet Deposit |
|--------|-------------------------|-----------------|----------------|
| 100103 | Elasto-Deck Bt – 5 Gal. | 48 Pails/Pallet | None           |

- Black elastomeric waterproof membrane
- Apply with airless sprayer, roller, brush, or squeegee
- Pre-mixed – no additives needed
- Works on concrete, block, wood, metal and other surfaces
- Horizontal and vertical surfaces
- Not for use in potable water tanks
- Meets astm: c-836-89
- Larr #: 24330

FOR MORE INFORMATION SEE [www.pacpoly.com/membraneAP.htm#](http://www.pacpoly.com/membraneAP.htm#)




## Testing

| Test          | Description                     | Result  |
|---------------|---------------------------------|---------|
| ASTM D-412-98 | Tensile Strength                | 436 PSI |
| ASTM D-412-98 | Percent Elongation              | 700%    |
| ASTM D-751-00 | Hydrostatic Pressure Resistance | 94 PSI  |

## Coverage

One coat is usually sufficient for damp proofing. If waterproofing is required, a second coat will be necessary.

- Approx. 40 Sq. Ft./Gallon at 30 mils thick.

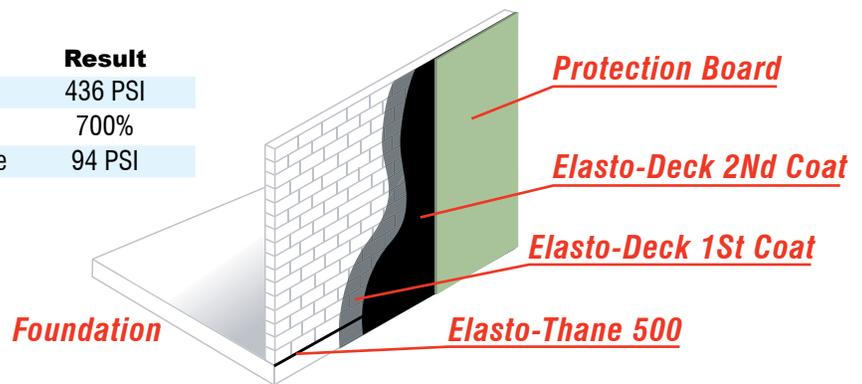

## Protection Board

| SKU    | Description                    | Quantity        | Pallet Deposit |
|--------|--------------------------------|-----------------|----------------|
| 120456 | 3/8" x 4' x 50" – Folded Sheet | 45 Bndl./Pallet | None           |

- New lightweight EPS foam protection board, for quick installation
- EPS Foam board meets HUD Specification, ASTM C578 and ESR 1788
- InsulFoam does not sustain mold and mildew growth.

FOR MORE INFORMATION SEE  
<http://www.insulfoam.com/>



