

Metal lath is a versatile expanded steel base widely used for interior and exterior plaster and stucco & stone reinforcement. The lath is formed by making thousands of silts and expanding the metal until it resembles a diamond pattern.

Packaging

- 1.75 Expanded Metal Lath - 8' : 500 pcs/pallet
- 2.5 Expanded Metal Lath - 8' : 500 pcs/pallet
- 2.5 Dimpled/Self Furred Lath - 8' : 250 pcs/pallet

Product Specifications

1.75 Metal Lath Specifications


Item	Specification	Tolerance
Galvanization	80g/m2	—————
Width	27”(686mm)	+/- 3/8”(9.5mm)
Length	96”(2439mm)	-0”.+1”(25.4mm)
Weight	1.75 lbs/sq. yds.	+/-10%
Total weight	3.2 lbs.	+/-10%

2.5 Metal Lath Specifications


Item	Specification	Tolerance
Galvanization	80g/m2	—————
Width	27”(686mm)	+/- 3/8”(9.5mm)
Length	96”(2439mm)	-0”.+1”(25.4mm)
Total area	2619”(2.02 Sq. Yds.)	
Weight	2.5 lbs/sq. yds.(1.4kg/m ²)	+/-10%
Total weight	5.05 lbs.	+/-10%

ASTM C 847;ASTM A653

Flat and Dimpled are offered. Dimple spacing 5-1/4" on length with offset rows 5-1/4" apart on width.

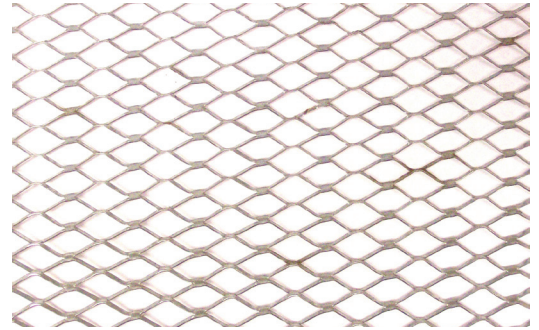

Expanded Lath

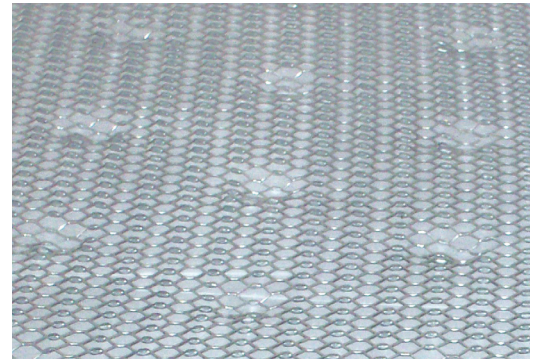

Dimpled/ Self Furred Lath